

APE D138-42 Single Acting Diesel Impact Hammer

D138-42 in an offshore leader.



MODEL D138-42 (13.8 metric ton ram)

SPECIFICATIONS

Stroke at maximum rated energy	135 in (343 cm)
Maximum rated energy (Setting 4)	342,326 ft-lbs (462.14 kNm)
Setting 3	304,670 ft-lbs (411.30 kNm)
Setting 2	263,591 ft-lbs (355.85 kNm)
Minimum rated energy (Setting 1)	219,089 ft-lbs (295.77 kNm)
<i>(Variable throttle allows for infinite fuel settings)</i>	

Maximum obtainable stroke	150 in (381 cm)
Maximum obtainable energy	455,522 ft-lbs (573 kNm)
Speed (blows per minute)	34-53

WEIGHTS (Approximate)

Piston	30,429 lbs (12,800 kg)
Anvil	7,665 lbs (3,476 kg)
Anvil cross sectional area	630.47 in ² (4067.54 cm ²)
Hammer weight (includes trip device)	70,295 lbs (31,879 kg)
Typical operating (weight with DB26 and H-beam insert)	Consult Factory

CAPACITIES

Fuel tank (runs on diesel or bio-diesel)	53 gal (155 liters)
Oil tank	8 gal (32 liters)

CONSUMPTION

Diesel or Bio-diesel fuel	11 gal/hr (30 liters/hr)
Lubrication	1 gal/hr (2.9 liters/hr)
Grease	8 to 10 pumps every 20 minutes of operation time.

STRIKER PLATE

Weight	1,036 lbs (470 kg)
Diameter	25 in (63.5 cm)
Area	491 in ² (3167.74 cm ²)
Thickness	8 in (20.32 cm)

CUSHION MATERIAL


Type/Qty	Micarta / 2 each
Diameter	25 in (63.5 cm)
Thickness	1 in (25.4 mm)

Type/Qty	Aluminum / 3 each
Thickness	1/2 in (12.7 mm)
Diameter	25 in (63.5 cm)
Total Combined Thickness	3.5 in (8.89 cm)
Area	491 in ² (3167.74 cm ²)
Elastic-modulus	285 ksi (1,965 mpa)
Coeff. of restitution	0.8

Optional Variable Throttle Control.



Cushion Material.

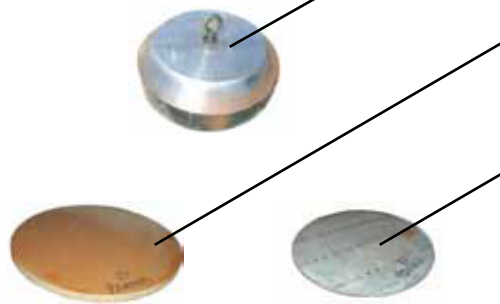

Standard Offshore.



OFFSHORE LEADER

Offshore for 98"/2.5 meter piles and under	Consult Factory
--	-----------------

MINIMUM BOX LEAD SIZE/OPERATING LENGTH

Minimum box leader size	8 in x 43 in (20.32 cm x 109 cm)
Operating length for offshore leader	408 in (1036.32 cm)



Corporate Offices
7032 South 196th
Kent, Washington 98032 USA
(800) 248-8498 & (253) 872-0141
(253) 872-8710 Fax

Visit our WEB site:
www.apevibro.com
e-mail: ape@apevibro.com