




J&M Model 760 Top Drive Auger

The Worlds Largest Provider of
Foundation Construction Equipment

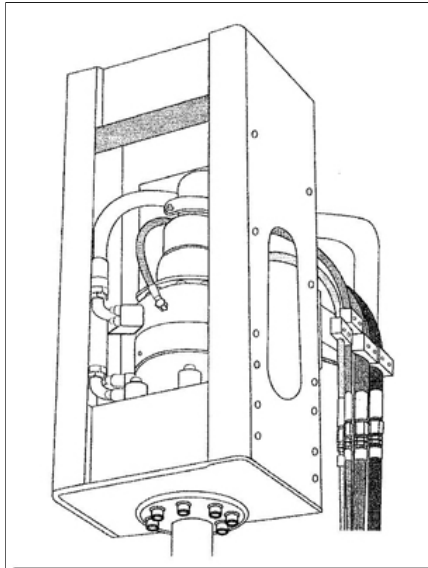

Specifications		Standard	Metric
Low Speed High Torque	Torque	ft-lbs per 1000 psi	kgm per 69 bar
	Max Pressure	psi	bar
	Rotation Speed	0 rpm	
	Max Flow	0 gpm @ 0 gal / rev	0 lpm @ 0 lit / rev
	Max Horse Power	0 hp	0 kW
High Speed Low Torque	Torque	1,556 ft-lbs per 1000 psi	215 kgm per 69 bar
	Max Pressure	4,500 psi	310 bar
	Rotation Speed	75 rpm	
	Max Flow	60 gpm @ 0.8 gal / rev	227 lpm @ 3.03 lit / rev
	Max Horse Power	157 hp	117.07 kW
Crowd Force		20,000 lbs	9,072 kg
Suspendid Weight		1,400 lbs	635 kg
Length		17 in	43 cm
Width (Lead Section)		20 in	51 cm
Width (Overall)		in	cm
Height		46 in	117 cm
ID of Output Shaft		3 in	6 cm
ID of Rotary Joint		in	cm
API Adapters		API 3 inch	
Lead Adapters		8 x 20, 8 x 26	

WWW.APEVIBRO.COM
(800) 248-8498
webmaster@apevibro.com



Specifications may vary due to site conditions, specific hammer conditions or product set up. Specifications may change without notice.
Consult the factory for details on any specific product (800) 248-8498.

