




# APE Model 250 Variable Moment Vibratory Driver Extractor

The Worlds Largest Provider of  
Foundation Construction Equipment

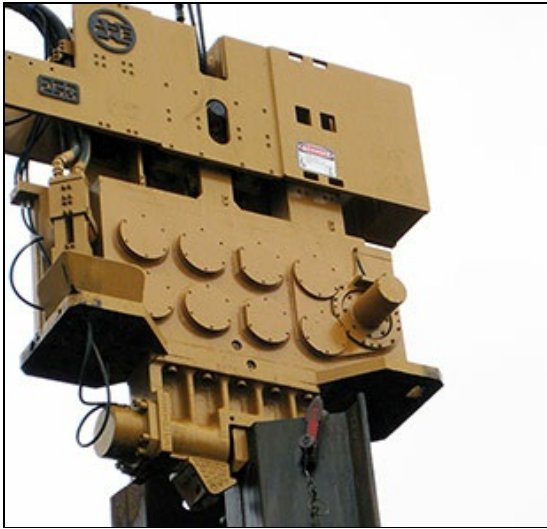

SPECIFICATIONS	DATA
Eccentric Moment	4,500 in-lbs (51.85 kgm)
Drive Force	269 tons (2,389 kN)
Frequency Maximum (VPM)	0 - 2,050 vpm
Max Line Pull	99 tons (881 kN)
Bare Hammer Weight w/o Clamp	15,400 lbs (6,985 kg)
Throat Width	14.00 in (36 cm)
Length	69.00 in (175 cm)
Height w/o Clamp	102.00 in (259 cm)

## APE Model 765 Power Unit

SPECIFICATIONS	DATA
Engine Type	Caterpillar C18 Tier II
Horse Power	765 HP (563 kW)
Drive Pressure	0 - 4,500 psi (310 bar)
Drive Flow	220 gpm (833 lpm)
Clamp Pressure	4,800 psi (69,618 bar)
Clamp Flow	10 gpm (3 lpm)
Engine Speed	2,100 rpm
Weight	20,000 lbs (9,072 kg)
Length	152 in (385 cm)
Width	82 in (208 cm)
Height	94 in (239 cm)
Hydraulic Reservoir	450 gal (1,703 L)
Fuel Capacity	150 gal (568 L)



Specifications may vary due to site conditions, specific hammer conditions or product set up.  
Specifications may change without notice.  
Consult the factory for details on any specific product (800) 248-8498.

